





fitting instructions

STS 1009K Acoustic/smoke perimeter seal

:35

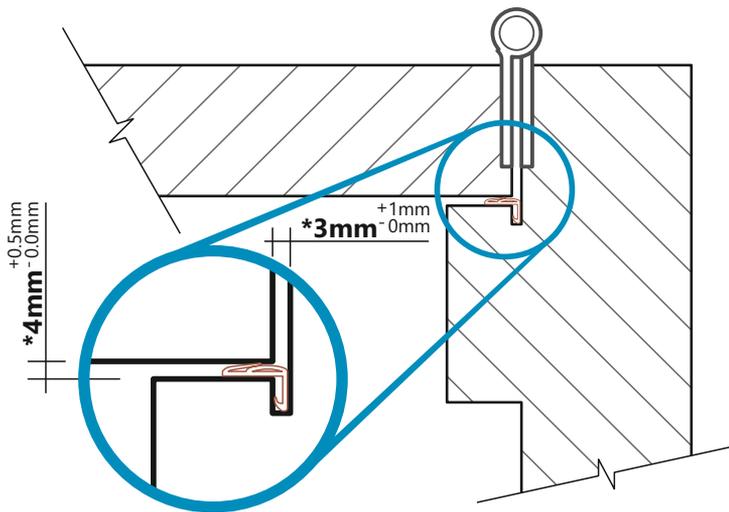

KERF FIX DETAIL - "COMPRESSION" MODE



STS 1009 & 1009K

Perimeter acoustic/smoke seal

Available in both kerf-fit and self-adhesive versions, the STS1009 is the most versatile, cost-effective perimeter seal on the market. It offers simple solutions and is specifically designed to have little to no effect to the operational integrity of the door.

Used in "compression", the STS1009 fits to the active face of the door-stop and thus has a minimal effect on the force required to close the door. The low co-efficient of the material ensures even less resistance to compression and excellent product recovery when the door is opened.

Where possible, it is preferable to mitre corners when fitting either version of STS1009.

Installation Notes, Guidelines & Recommendations

* The dimensions above relate to a fully-finished door and its frame.

IMPORTANT NOTE - Final finish to doors & frames:

For all paints and lacquers; **always** refer to the manufacturer's guidelines for information relating to recommended curing/drying times and whether suitable for use with products manufactured from PVCs, butyls and/or nitriles.

For site-applied, final finishes, 1009 seals should be fitted/applied only when the final coat is completely dry/fully cured. In addition, ensure there is no build-up of paint/lacquer in the fitting area and that door edges are free of drips and runs.